

Type TVR1 H₂ 70 MPa

High-Performance Check Valve for hydrogen for use with cars (DN 4 mm)

With this product WEH offers a high performance check valve for use with hydrogen cars of the latest generation. The check valve system is designed to minimize the effect that dirt particles have on the sealing components within the unit.

The WEH-TV1 H₂ 70 MPa Check Valve is designed of high-grade corrosion-resistant steel achieving a very durable unit (see TN1 H₂ 70 MPa receptacle).



Type TVR1 H₂ 70 MPa

Technical Data:

Application:
H₂-check valve for cars.

Temperature range:
-40°C bis +85°C


Design:
All parts corrosion-resistant steel. Seals hydrogen compatible.

Pressure range:
PN = 700 bar
PS = 875 bar
PT = 1255 bar

Registration:
PED 97/23/EU: CE 0036
corresponds to EIHP
(version 12b)

When enquiring for this check valve please specify the requested connection.

Dimensions (mm):

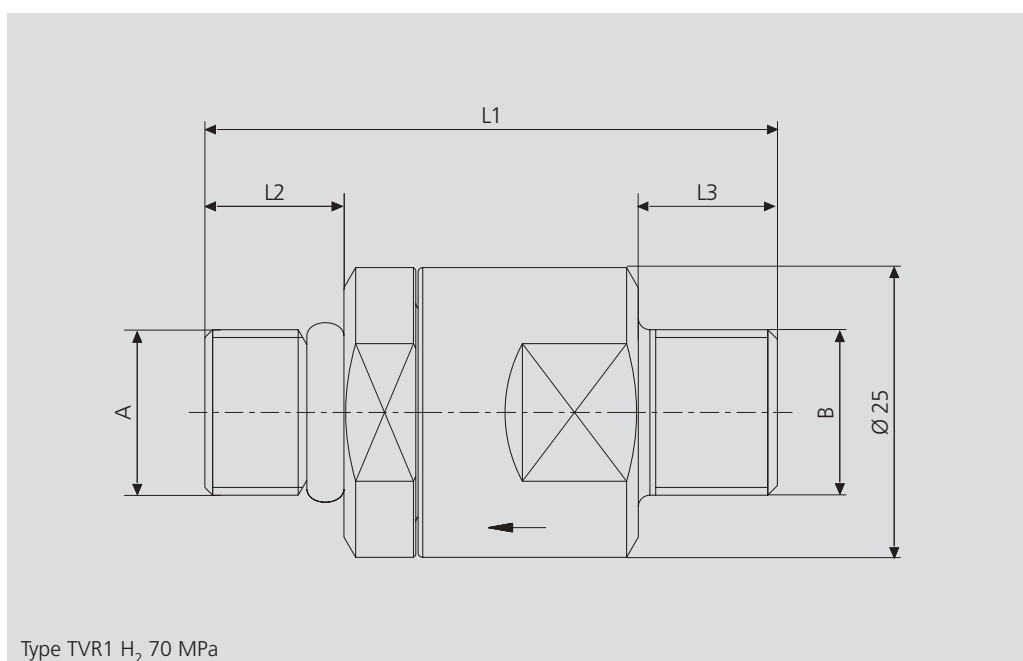

Ordering:

Description	Inlet B (mm)	Outlet A (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Part No.
TVR1 H ₂ 70 MPa	O-lok Face Seal** for tube Ø 6 mm (1/4")	UNF 9/16"-18* external thread	49.4	12.0	12.0	C1-75561
TVR1 H ₂ 70 MPa	UNF 9/16"-18* external thread	O-lok Face Seal** for tube Ø 6 mm (1/4")	51.4	12.0	12.0	C1-76958
TVR1 H ₂ 70 MPa	O-lok Face Seal** for tube Ø 10 mm (3/8")	O-lok Face Seal** für tube Ø 6 mm (1/4")	49.4	12.0	12.0	C1-76959

* acc. to SAE J1926

** O-lok acc. to SAE J1453

Manufacturer:
WEH GmbH
Gas Technology

Siemensstraße 5
89257 Illertissen/Germany

Phone: +49 7303 95190-0
Fax: +49 7303 95190-9999

Email: sales@weh.com
http://www.weh.com